


INTERIOR SIGNAGE GUIDELINES

Front lighting SAS logo

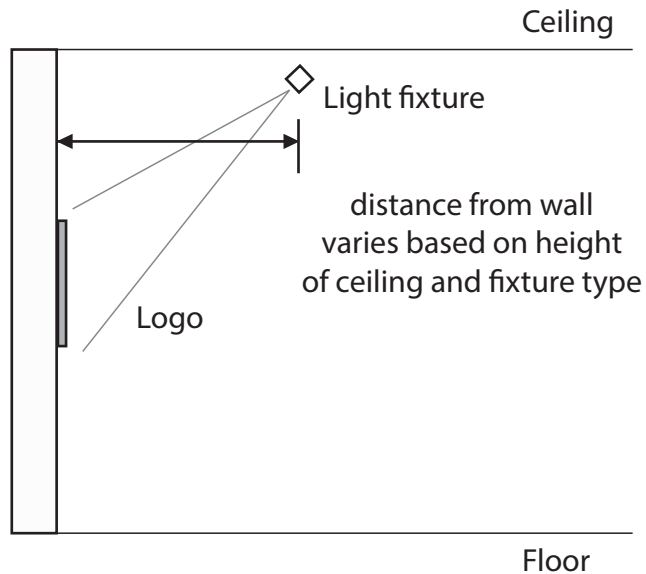

Side view of logo on wall

Situation: Front lighting the SAS logo - interior application

The preferred method is to use high quality linear light fixtures with 3000-4000 kelvin.

Position the fixture to ensure complete coverage of the logo and at a point where shadows are minimized.

Technical lighting questions?

Mike Fry (michael.fry@sas.com)
Event Design Project Manager, Art and Scenic Operations
Corporate Headquarters, Cary, NC, US